



#2  
4 Apr 02  
R. Tallent  
INVESTOR IN PEOPLE  
The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

16 JAN 2002



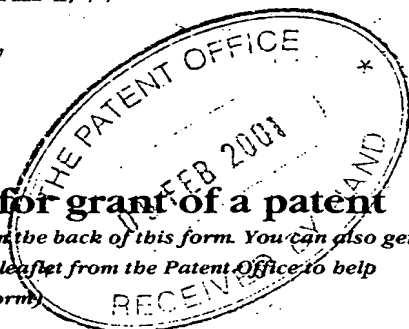

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road

Newport

Gwent NP9 1RH

1. Your reference

MJN/67500

2. Patent application number

(The Patent Office will fill in this part)

0102825.7

05 FEB 2001

3. Full name, address and postcode of the or of each applicant (underline all surnames)

ABB Offshore Systems Limited  
2 High Street  
Nailsea  
Bristol BS48 1BS

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

GB

7692221001

4. Title of the invention

MONITORING PARTICLES IN A  
FLUID FLOW

5. Name of your agent (if you have one)

PAGE HARGRAVE

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Southgate, Whitefriars  
Lewins Mead  
Bristol BS1 2NT

Patents ADP number (if you know it)

05996483001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 7

Claim(s) 4

Abstract 1

Drawing(s) 1

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) TWO

Request for preliminary examination and search (*Patents Form 9/77*) ONE

Request for substantive examination (*Patents Form 10/77*) -

Any other documents -  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

PAGE HARGRAVE

Date 02.02.01

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr M J Newstead (0117) 927 6634


## Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

## Notes


- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

Statement of inventorship and of  
right to grant of a patent

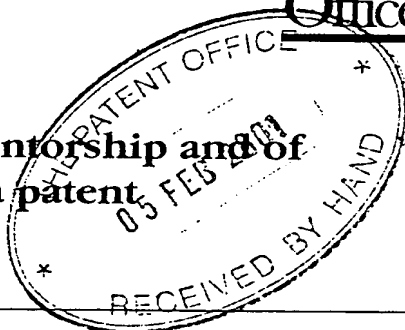

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference MJN/67500
2. Patent application number  
(if you know it) 0102825.7 05 FEB 2001
3. Full name of the or of each applicant ABB Offshore Systems Limited
4. Title of the invention MONITORING PARTICLES IN A FLUID FLOW
5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent  
By virtue of the employment of the inventor with ABB Offshore Systems AS of Norway and an agreement between the latter and the applicant.
6. How many, if any, additional Patents Forms 7/77 are attached to this form?  
(see note (c)) -
7. I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to.  
Signature  Date 02.02.01  
PAGE HARGRAVE
8. Name and daytime telephone number of person to contact in the United Kingdom  
Mr M J Newstead (0117) 927 6634

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Klas Goran Eriksson  
Bondibraten 107  
1387 Asker  
Norway

Patents ADP number (if you know it): 8015707001

Patents ADP number (if you know it):

**Reminder**

Have you signed the form?

Patents ADP number (if you know it):

MONITORING PARTICLES IN A FLUID FLOW

The present invention relates to monitoring particles in a fluid flow.

5 In oil production, a by-product is often water. This is commonly disposed of by injecting it under pressure into a well. While injecting this water, a matter of concern is its quality. Among the parameters of interest are the amount of dispersed oil and the amount of solid particles in the water. These parameters affect the injectivity of the water into the well. Particles with sizes down to a few micrometres have been shown  
10 to have a negative influence on the injectivity.

An existing device for monitoring oil particles in water is disclosed in International Patent Application Publication No. WO 00/46586 and is embodied in an analyser called ViPA developed by Jorin Limited, 4 Vulcan Close, Sandhurst, Berkshire, United  
15 Kingdom - see also the paper "On-line determination of particle size and concentration (solids and oil) using ViPA Analyser", Dr Kami Nezhati, et al, presented at the "7<sup>th</sup> Annual International Forum Production Separation Systems", 23 May 2000, Oslo. However, such an analyser uses a special measurement cell, requiring a side-stream in the overall process. Also, the analyser is not directly suitable for subsea operation.

20

According to the present invention, there is provided apparatus for use in monitoring particles in a fluid flow, comprising:

25

a duct for receiving the fluid flow;

light generating means adjacent the duct for transmitting light into the fluid flow via a first at least partially light-transmissive part of the duct;

30

light-responsive detection means adjacent a second at least partially light-transmissive part of the duct for receiving light from the light generating means which has passed through the fluid flow;

processing means for location remotely from said duct; and

means for coupling the processing means with the detection means, the processing means being adapted for processing signals therefrom to provide data relating to particles in the fluid flow.

5 Said duct may comprise a pipe section provided with means for mounting it in a run of pipework.

Said first and second at least partially light-transmissive parts may comprise first and second windows in a wall of the duct.

10

Said first and second at least partially light-transmissive parts may be diametrically opposite each other.

15

Inside said duct, each of said first and second at least partially light-transmissive parts may have a non-stick coating.

20

Said duct may be provided with means for flushing away deposits from each of said first and second at least partially light-transmissive parts inside the duct. Such flushing means may be located downstream of said first and second at least partially light-transmissive parts. The flushing means may comprise, for each of said first and second at least partially light-transmissive parts, a respective nozzle for directing a flushing fluid at the respective part from inside the duct.

25

Said light generating means may comprise a light-emissive diode, for example a plurality of such diodes, connected for example in parallel.

30

Said light-responsive detection means may comprise a television camera, for example being provided with a lens and frame grabbing means for capturing one magnified single image at a time, focussed inside said duct, the signals received by said processing means representing successive captured images from said grabbing means.

Said processing means may provide data relating to the amount and/or size distribution of particles of a predetermined kind in the fluid flow.



The surface of said first at least partially light-transmissive part inside said duct may be uneven for reducing deposit build-up on it.

5 The apparatus may include a plurality of such light-responsive detection means, and in this case it may be such that only one of said light-responsive detection means is used at a time. Also, each of said light-responsive detection means could be such that it receives light from said second at least partially light-transmissive part.

10 There may be a plurality of such first at least partially light-transmissive parts. In this case, there may be a plurality of such second at least partially light-transmissive parts, each of which is associated with a respective one of said first at least partially light-transmissive parts. In this case, where there is a plurality of light-responsive detection means, each of them may receive light from a respective one of such second at least partially light-transmissive parts.

15 The or each first and second at least partially light-transmissive parts may be associated with respective such flushing means.

20 There may be a plurality of such light generating means. In this case, the apparatus may be such that only one of said light generating means is used at a time. Where there is a plurality of first at least partially light-transmissive parts, each of said light generating means may be associated with a respective one of the first at least partially light-transmissive parts.

25 The invention also comprises apparatus according to the invention in which said duct is mounted in pipework for conveying the fluid flow, the processing means being located at a location remote therefrom and the coupling means coupling the processing means and the light-responsive detection means. Said pipework may be for conveying water into a well in a hydrocarbon production system and in this case the or each first  
30 and second light-transmissive parts, the or each light generating means and the or each light-responsive means may be sub-sea, said remote location being, for example, a topside platform.

The present invention also comprises a method of monitoring particles in a fluid flow, using apparatus according to the invention.

5 The present invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

Fig. 1 is a schematic view of an example of apparatus according to the invention; and  
Fig. 2 is a detailed view showing how flushing means may be provided.

10 Referring first to Fig. 1, apparatus for use in monitoring particles, e.g. oil particles, in water being injected under pressure into a well in an oil production system comprises: a duct provided by a pipe section 1 having flanges 2 and 3 at opposite ends for mounting it in a run of pipework conveying such water; two diametrically opposite windows 4 and 5 in the wall of the pipe section 1; a light source 6 mounted at the window 4 for  
15 transmitting light into the pipe section 1; light-responsive detection means in the form of a picture capturing unit 7 mounted at the window 5; processing means in the form of an analysis unit 8 mounted at a location remote from the section of pipe 1, e.g. at a topside platform; and a power and communication link 9 which, on the one hand, provides power for the light source 6 and the picture capturing unit 7 and, on the other  
20 hand, provides for a communication channel coupling the picture capturing unit 7 with the analysis unit 8 to provide the latter with signals from the picture capturing unit 7.

The pipe section 1, the light source 6, and the picture capturing unit 7 are designed for sub-sea installation, while the analysis unit 8 is designed for a normal office  
25 environment. It may be a standard personal computer, with necessary communications facilities and software.

Light source 6 sends light through the window 4 into the pipe section 1. The light source 6 can, for example, use light emitting diodes. For redundancy and power increase,  
30 several light emitting diodes connected in parallel may be used. For optional further redundancy, several such groups can be used, with one switched on a time. Each such group could be associated with a respective such window 4.

The window 4 used at the light source 6 can optionally be given an uneven surface, taking into use the so called "Lotus effect". This effect is found in nature on the leaves of the lotus flower, and is exploited commercially in several products. The idea is basically that the uneven surface gives less contact area for any particle to attach to, such  
5 that the attracting forces between surface and particle are concentrated in a smaller area. This minimises the attractive force between particle and surface, and thus both minimises deposits forming, and makes flushing of deposits easier.

The picture capturing unit 7 outside the window 5 comprises a miniature television  
10 camera equipped with a microscope lens. The miniature camera captures a magnified picture with a focus slightly inside the window 5.

As the lifetime of the camera may be a concern, as an option a multitude of cameras can be used, which are turned on one by one as others cease to work. This multitude of  
15 cameras can either share the same window 5, or have separate such windows (each of which could be associated with a respective window 4 in the case where there are several such windows).

For each camera, a so-called "frame grabber" freezes one picture from the television  
20 camera at a time. Each frozen picture is then transmitted via the link 9 to the analysis unit 8.

If the pipe section 1 is mounted on the seabed, the analysis can then be mounted on a topside platform in a dry environment.  
25

When one picture has been transmitted to the analysis unit 8, a second picture is taken and transmitted. After a sufficient number of pictures has been analysed (in the order of a few hundred), the analysis unit 8 has built up a good statistical count of the particles present. The analysis unit 8 can see the difference between a dispersed oil droplet and  
30 a solid particle from the shape. Thus, the amount of solid particles and dispersed oil droplets is independently determined.

The analysis unit 8 may process the information from the picture capturing unit 7 as disclosed in WO 00/46586 for example or as in the above-mentioned ViPA analyser of Jorin Limited.

5 The pipe section 1 could be, for example, about 51 cm (about 20 inches) long and have an internal diameter of about 15 cm (about 6 inches). The windows 4 and 5 can be made of diamond or sapphire, and a suitable non-stick coating can be applied to minimise build-up of, for example, wax deposits.

10 The molecules that can cause build-up are mainly wax and asphaltene molecules. Each window surface is thus tailored to minimise adhesion to such molecules. This will minimise deposits, but possibly not eliminate them completely.

In case deposits occur anyway, a secondary method of removing them is required. This  
15 may be done by high pressure methanol spraying. In sub-sea installations, high-pressure methanol is routinely available (as it is commonly used for avoiding hydrate formation during shutdown of oil streams).

In Fig 2, is shown a methanol nozzle 10, which is used for intermittently flushing away  
20 deposits from the window using high pressure methanol injected into the nozzle in the direction of arrow A. The nozzle 10 is mounted downstream of the window 5 (arrow B indicating the direction of flow in pipe section 1) and directs the high pressure spray of methanol to the window 5 as shown by arrow C. There is a further such nozzle, mounted downstream from window 4. In the case where there is a multiplicity of  
25 cameras each with its own window, then each such window would be provided with its respective such nozzle.

The above described apparatus, using analysis unit 8, is capable of measuring  
30 simultaneously the amount of dispersed oil droplets and dissolved particles, with a resolution down to a few micrometres. Also, data may be provided relating to the amount of solid particles and oil droplets in the fluid flow and/or data relating to size distribution for solid particles and/or oil droplets in the fluid flow. Although the

apparatus is primarily intended for sub-sea installation it could also be used elsewhere and the invention itself is not limited to use in a sub-sea installation.

**CLAIMS**

1. Apparatus for use in monitoring particles in a fluid flow, comprising:  
a duct for receiving the fluid flow;  
5 light generating means adjacent the duct for transmitting light into the fluid flow via a first at least partially light-transmissive part of the duct;  
10 light-responsive detection means adjacent a second at least partially light-transmissive part of the duct for receiving light from the light generating means which has passed through the fluid flow;  
processing means for location remotely from said duct; and  
15 means for coupling the processing means with the detection means, the processing means being adapted for processing signals therefrom to provide data relating to particles in the fluid flow.
- 20 2. Apparatus according to claim 1, wherein said duct comprises a pipe section provided with means for mounting it in a run of pipework.
3. Apparatus according to claim 1 or 2, wherein said first and second at least partially light-transmissive parts comprise first and second windows in a wall  
25 of the duct.
4. Apparatus according to any preceding claim, wherein said first and second at least partially light-transmissive parts are diametrically opposite each other.
- 30 5. Apparatus according to any preceding claim, wherein inside said duct, each of said first and second at least partially light-transmissive parts has a non-stick coating.

6. Apparatus according to any preceding claim, wherein said duct is provided with means for flushing away deposits from each of said first and second at least partially light-transmissive parts inside the duct.
- 5 7. Apparatus according to claim 7, wherein said flushing means is located downstream of said first and second at least partially light-transmissive parts.
8. Apparatus according to claim 6 or 7, wherein said flushing means comprises, for each of said first and second at least partially light-transmissive parts, a  
10 respective nozzle for directing a flushing fluid at the respective part from inside the duct.
9. Apparatus according to any preceding claim, wherein said light generating means comprises a light-emissive diode.
- 15 10. Apparatus according to claim 9, wherein said light generating means comprises a plurality of such diodes.
11. Apparatus according to claim 10, wherein said diodes are connected in  
20 parallel.
12. Apparatus according to any preceding claim wherein said light-responsive detection means comprises a television camera.
- 25 13. Apparatus according to claim 12, wherein said camera is provided with a lens and frame grabbing means for capturing one magnified single image at a time, focussed inside said duct, the signals received by said processing means representing successive captured images from said grabbing means.
- 30 14. Apparatus according to any preceding claim, which is such that said processing means provides data relating to the amount and/or size distribution of particles of a predetermined kind in the fluid flow.

15. Apparatus according to any preceding claim, wherein the surface of said first at least partially light-transmissive part inside said duct is uneven for reducing deposit build-up on it.
- 5 16. Apparatus according to any preceding claim, including a plurality of such light-responsive detection means.
17. Apparatus according to claim 16, which is such that only one of said light-responsive detection means is used at a time.
- 10 18. Apparatus according to claim 16 or 17, wherein each of said light-responsive detection means receives light from said second at least partially light-transmissive part.
- 15 19. Apparatus according to any preceding claim, wherein there is a plurality of such first at least partially light-transmissive parts.
20. Apparatus according to claim 19 as dependent on any of claims 1 to 17, wherein there is a plurality of such second at least partially light-transmissive parts, each of which is associated with a respective one of said first at least partially light-transmissive parts.
- 20 21. Apparatus according to claim 20 as dependent on claim 16 or 17, wherein each of said light-responsive detection means receives light from a respective one of said second at least partially light-transmissive parts.
- 25 22. Apparatus according to any of claims 19 to 21 as dependent on any of claims 6 to 8, wherein the or each first and second at least partially light-transmissive part is associated with respective such flushing means.
- 30 23. Apparatus according to any preceding claim, wherein there is a plurality of such light generating means.



24. Apparatus according to claim 23, which is such that only one of said light generating means is used at a time.
- 5 25. Apparatus according to either of claims 23 and 24 as dependent on claim 19 or any of claims 20 to 22 as dependent on claim 19, wherein each of said light generating means is associated with a respective one of said first at least partially light-transmissive parts.
- 10 26. Apparatus according to any preceding claim, with said duct mounted in pipework for conveying the fluid flow, the processing means being located at a location remote therefrom and the coupling means coupling the processing means and the light-responsive detection means.
- 15 27. Apparatus according to claim 26, wherein said pipework is for conveying water into a well in a hydrocarbon production system.
- 20 28. Apparatus according to claim 27, wherein said duct, the or each first and second light-transmissive parts, the or each light generating means and the or each light-responsive means are sub-sea.
- 25 29. Apparatus according to claim 28, wherein said remote location is a topside platform.
- 30 30. A method of monitoring particles in a fluid flow, using apparatus according to any preceding claim.
31. Apparatus for use in monitoring particles in a fluid, substantially as herein described with reference to the accompanying drawing.
- 30 32. A method of monitoring particles in a fluid flow, substantially as herein described with reference to the accompanying drawing.

ABSTRACT

MONITORING PARTICLES IN A FLUID FLOW

5 Apparatus for use in monitoring particles in a fluid flow comprises: a duct (1) for  
receiving the fluid flow; light generating means (6) adjacent the duct for transmitting  
light into the fluid flow via a first at least partially light-transmissive part (4) of the duct;  
light-responsive detection means (7) adjacent a second at least partially light-  
transmissive part (5) of the duct for receiving light from the light generating means  
10 which has passed through the fluid flow; processing means (8) for location remotely  
from said duct; and means (9) for coupling the processing means with the detection  
means, the processing means being adapted for processing signals therefrom to provide  
data relating to particles in the fluid flow.

15 (Fig. 1)